

# ShowerStart® Express Tub and Shower System – Handheld Showerheads

EV3342-CP

EV3382-CP

## OVERVIEW

Revive your bathroom with this forward-thinking tub spout and multifunction handheld showerhead combo to enjoy the definitive fusion of comfort, convenience, and conservation. Featuring ShowerStart® Express technology, the ShowerStart® Express Tub and Shower System gets your shower warm up to 3X faster. You'll also enjoy great feeling high-pressure sprays, more convenience and freedom during your get-ready-routine, and lower utility bills. This system works by cleverly speeding hot water delivery, conveniently saving the hot water used while waiting for your shower to get warm, efficient showering, and eliminating tub spout diverter leaks to save up to 15 gallons per shower.

## Saves Up to 15 Gallons of Water & Heating Energy In 3 Unique Ways

- **Hot Shower Standby**  
Stops empty showers from running on-and-on by auto-pausing flow when hot water arrives (~95°F).
- **Great Feeling, Efficient Showers**  
WaterSense certified multifunction handheld showerhead delivers high-pressure sprays for warm and soothing showering experiences. Full-body, massage and pause options available.
- **Eliminates Tub Spout Diverter Leaks**  
Thermostatic seal stops hot water from exiting tub spout while shower is running.

## Fast Hot Water

Speeds hot water delivery to get showers warm up-to 3X faster.

## Warm-Up Freedom

Multi-task (shave, brush teeth, go about your morning routine) while waiting for hot water to arrive without water and energy waste.

## Seamless Showering

Automatically diverts flow to showerhead when hot water arrives for hands-free shower warm-ups.

## Reduces Flood Risk

Prevents unattended warm-ups from overflowing tub by reducing flow once hot water arrives.



evolve™

MODEL #	Description	Finish
EV3342	ShowerStart® Express Tub and Shower System with Multifunction Handheld Showerhead	Chrome
EV3382	ShowerStart® Express Tub and Shower System with Multifunction Handheld Showerhead – Contractor Pack	Chrome



ASME A112.18.1 / CSA B125.1

Integrated backflow prevention per ASME A112.18.1/CSA B125.1

Conforms to A112.18.1.

189-0058-02-00



1701 Charleston Regional Parkway, Suite A  
Charleston, SC 29492  
(843) 971-1414  
www.amconservation.com

# ShowerStart® Express Tub and Shower System – Handheld Showerheads

**evolve™**

Enjoy More. Use Less.™

EV3342-CP

EV3382-CP

## SPECIFICATIONS




MODEL #	SPRAY PATTERN	FLOW RATE	INCLUDES MOUNTS	CONTRACTOR PACK
EV3342	Multifunction	1.25, 1.5 gpm	Yes	No
EV3382	Multifunction	1.25, 1.5 gpm	No*	Yes

\*Order mounts separately, see Tub Spout Mount Options Table.

## TUB SPOUT MOUNT OPTIONS

MODEL #	DESCRIPTION	PIPE COMPATIBILITY	PACK QTY
EV3102	½" Slip Fit Mount	Copper, Galvanized	9 Pack
EV3103	½" NPT Threaded	Galvanized	9 Pack
EV3104	¾" NPT Threaded	Galvanized	9 Pack

## DIMENSIONS

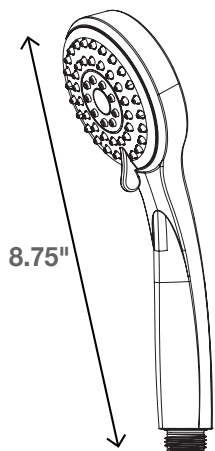

## CASE

MODEL #	L	W	H	CASE QTY.	GROSS WT.
EV3342	28"	11"	11.6"	9	31.2 lb
EV3382	17.5"	10"	15.9"	9	23.8 lb

## TECHNICAL NOTES

### Compatibility:

- For use in homes with static water pressure >35 psi
- Works with galvanized or copper plumbing
- Tankless systems require a minimum flow rate to produce hot water. With some tankless systems, a brief yet noticeable change in the shower's temperature may occur shortly after resuming the shower's normal flow

### Default operating mode:

- The system's default mode assumes a shower will be taken

### Bypass auto-divert for bathing:

- PUSH on the tub spout's diverter after auto-diverting has activated to bypass the handheld showerhead, filling the tub with hot water

### Auto resets for next use:

- The system automatically resets to its default mode after a shower or bath is completed

### This product is not an anti-scald device

- Lower water heater to 120° F (49° C)
- Always resume water flow and check water temperature before entering shower

## 3 YEAR WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 3 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit [amconservation.com/warranties](http://amconservation.com/warranties).

For warranty claims, please contact:

[customercare@amconservation.com](mailto:customercare@amconservation.com)

To learn more, please visit:

[www.AMConservation.com](http://www.AMConservation.com)