

Tri-Max™ Aerator

N3610CH

OVERVIEW

The Tri-Max™ adjustable aerator delivers satisfying performance while saving 30-75% more water than standard aerators by letting users adjust flow to the task at hand. Simply twist and click to switch the flow. Select 1.0 GPM for wetting & washing, 0.5 GPM for lathering, and 1.5 GPM for powerful rinsing. Integrated Equiforce® Technology ensures uniform flows, regardless of home water pressures and its versatile design ensures compatibility with both male and female threaded faucets.

FEATURES

- **Tailor Water Use To Washing Tasks**
Twist and click to choose between 1.0 GPM for wetting & washing, 0.5 GPM for lathering, and 1.5 GPM for powerful rinsing.
- **High Efficiency Performance**
Save 30-75% more water, and the energy used to heat it, than standard faucet aerators.
- **Integrated Equiforce® Technology**
Enjoy effective and uniform flows regardless of home water pressures.
- **Universal Compatibility**
Fits most standard male (15/16"-27) and female (55/64"-27) threaded faucets, ensuring fast and frustration-free installation across a wide range of faucets. Thread adapter installation key included.



Thread Adapter Installation Key

ORDERING INFORMATION

MODEL #	DESCRIPTION	BODY TYPE	FLOW RATE
N3610CH	Tri-Max needle spray aerator with install key	Chrome	0.5, 1.0, 1.5 GPM



095-0181-02-00



Certification & Performance Requirements
ASME A112.18.1 / CSA B125.1; ANSI/NSF 61



1701 Charleston Regional Parkway, Suite A
Charleston, SC 29492
(843) 971-1414
www.AMConservation.com



Tri-Max™ Aerator

N3610CH



Quality And Style Meets Efficiency™

DIMENSIONS

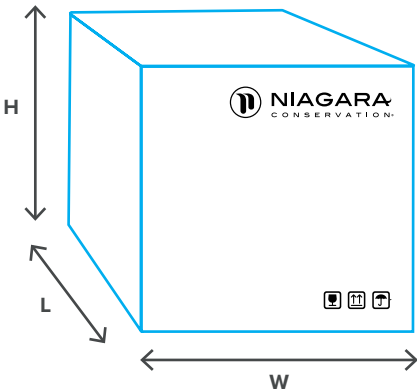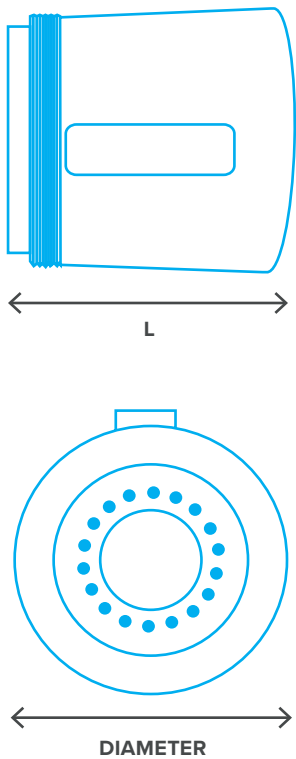

PRODUCT

MODEL #	L	DIA
N3610CH	1.125"	1.4"

CASE

MODEL #	L	W	H	CASE QTY.	GROSS WT.
N3610CH	7.4"	13.9"	7.6"	100	4.7 lbs.

10-YEAR LIMITED WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 10 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:

customercare@amconservation.com

To learn more, please visit:

www.AMConservation.com

