

A19 Standard LED Bulbs

OVERVIEW

Our dimmable A19 LED lamps are equipped with a 220° beam angle that produces even light from the socket base in a wide direction and can be used in enclosed fixtures. These lamps have a standard medium base which allows them to be easily installed into existing lamps, ceiling fixtures, recessed fixtures, sconces, pendants, and other decorative fixtures. Choose from E26 base bulbs or upgrade older fluorescent fixtures with our GU24 base options.

FEATURES

- Up to 25,000-hour lifespan
- Suitable for enclosed fixtures
- Suitable for damp locations
- E26 and GU24 base options are available
- Dimmable



25,000
HOURS



DIMMABLE



DAMP-
RATED



MERCURY
FREE




E26

GU24

SIMPLY CONSERVE®

COLOR TEMPERATURE



LIGHT TYPE	WARM WHITE 2700K-3000K	COOL WHITE/BRIGHT WHITE 3100 - 4500K	DAYLIGHT 5000K
Light Coloration	Hues ranging from orange to yellow-white	A more neutral white light may have a slightly blue tint	Blue-white light mimicking daylight
Ambiance Created	Cozy and inviting	Warm and welcoming	Crisp and invigorating
Ideal Rooms/Locations	Living rooms, kitchens, and bedrooms	Bathrooms, entryways, outdoors	Basements and garages
Ideal Applications	Table and floor lamps, pendants, and chandeliers	Vanities and overhead lighting	Task and security lighting

ORDERING INFORMATION

SOURCE	WATTAGE	LAMP TYPE	CCT	INCL. OPTIONS
L = LED	6 = 6W 9 = 9W 11 = 11W 12 = 12W 13 = 13W 15 = 15W 17 = 17W	A19 = A19 LAMP	27K = 2700K 50K = 5000K	ENC/ENCL = Suitable for enclosed fixtures 60 = 60-Pack



1701 Charleston Regional Parkway, Suite A
Charleston, SC 29492
(843) 971-1414
www.AMConservation.com


A19 Standard LED Bulbs

SIMPLYCONSERVE®

Savings Start Here™

DIMENSIONS

LAMP TYPE	H	W
E26	4.4"	2.5"
GU24	4.7"	2.5"

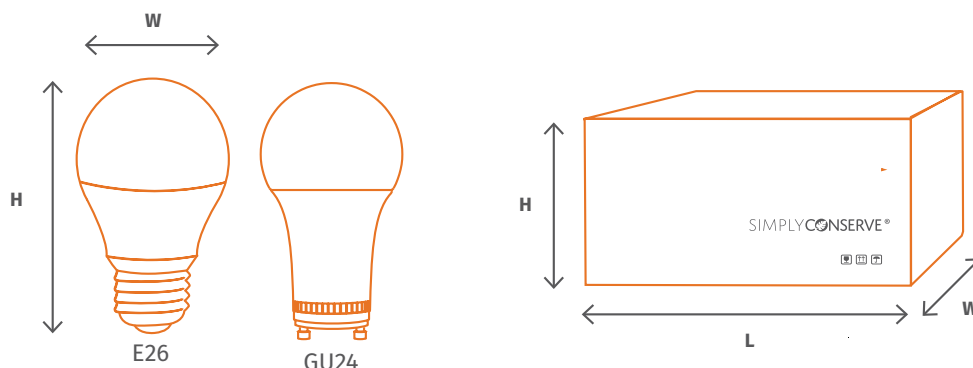

SPECIFICATIONS

MODEL #	BASE TYPE	WATTS	CCT	LUMENS	CRI	DIMMABLE	INCAN. EQUIV.	VOLTAGE	CASE DIMENSIONS	CASE GROSS WT.	CASE QTY	CONTRACTOR PACKS
L06A1927KENC60	E26	6W	2700K	480	≥80	✓	40W	120V	13.3" X 15.5" X 10.3"	6 lbs	60	✓
L06A1927KENCL	E26	6W	2700K	480	≥80	✓	40W	120V	12.7" X 12.7" X 10.0"	8.2 lbs	50	
L09A1927KENC60V2	E26	9W	2700K	800	≥80	✓	60W	120V	13.0" X 16.0" X 10.3"	7.9 lbs	60	✓
L09A1927KENCL	E26	9W	2700K	800	≥80	✓	60W	120V	12.7" X 12.9" X 10.0"	7.9 lbs	50	
L09A1927K-JA8	E26	9W	2700K	800	≥90	✓	60W	120V	12.8" X 12.9" X 9.9"	8 lbs	50	
L09A1940KENCL	E26	9W	4000K	800	≥80	✓	60W	120V	12.7" X 12.9" X 10.0"	7.9 lbs	50	
L09A1950KENCL	E26	9W	5000K	800	≥80	✓	60W	120V	12.7" X 12.9" X 10.0"	7.9 lbs	50	
L09DTD27K	E26	9W	2700K	800	≥80	N/A	60W	120V	13.0" X 13.0" X 10.1"	7.8 lbs	50	
LH09A1927KENC60V2	E26	9W	2700K	800	≥80	✓	60W	120V	15.7" X 13.4" X 10.3"	5.5 lbs	60	✓
LH09A1927KENCL	E26	9W	2700K	800	≥80	✓	60W	120V	12.7" X 12.8" X 9.7"	5.7 lbs	50	
L9A19DGU2430K	GU24	9W	4000K	810	≥90	✓	60W	120V	13.0" X 13.0" X 10.5"	8.3 lbs	50	
L9A19DGU2440K	GU24	9W	4000K	810	≥90	✓	60W	120V	13.0" X 13.0" X 10.5"	8.3 lbs	50	
L9A19DGU2450K	GU24	9W	4000K	810	≥90	✓	60W	120V	13.0" X 13.0" X 10.5"	8.3 lbs	50	
L11A1927KENCL-11	E26	11W	2700K	1100	≥80	✓	75W	120V	13.0" X 13.0" X 11.0"	7.8 lbs	50	
L11A1950KENCL-11	E26	11W	5000K	1100	≥80	✓	75W	120V	13.0" X 13.0" X 11.0"	7.8 lbs	50	
LH11A1927KENC60V2	E26	11W	2700K	1100	≥80	✓	75W	120V	15.5" X 13.6" X 10.4"	5.5 lbs	60	✓
LH11A1927KENCL	E26	11W	2700K	1100	≥80	✓	75W	120V	12.7" X 12.7" X 9.9"	5.8 lbs	50	
L12A1927K-JA8	E26	12W	2700K	1100	≥90	✓	75W	120V	13.4" X 13.7" X 11.0"	16.4 lbs	50	
L12A19DGU2430K	GU24	12W	3000K	1100	≥90	✓	75W	120V	13.0" X 13.0" X 10.6"	8.6 lbs	50	
L12A19DGU2440K	GU24	12W	4000K	1100	≥90	✓	75W	120V	13.0" X 13.0" X 10.6"	8.6 lbs	50	
L12A19DGU2450K	GU24	12W	5000K	1100	≥90	✓	75W	120V	13.0" X 13.0" X 10.6"	8.6 lbs	50	
L13A1927KENCL-11	E26	13W	2700K	1600	≥80	✓	100W	120V	14.0" X 14.0" X 10.8"	10 lbs	50	
L13A1950KENCL-11	E26	13W	5000K	1600	≥80	✓	100W	120V	14.0" X 14.0" X 10.8"	10 lbs	50	
LH15A1927KENCL	E26	15W	2700K	1600	≥80	✓	100W	120V	12.9" X 12.7" X 10.2"	8.3 lbs	50	
L17A12127K-JA8	E26	17W	2700K	1600	≥90	✓	100W	120V	13.0" X 14.0" X 11.0"	16.4 lbs	50	

5-YEAR LIMITED WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 5 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:
customer@amconservation.com

To learn more, please visit:
www.AMConservation.com