

LED Candelabra Bulbs

40W REPLACEMENT
4-5W LED

OVERVIEW

Bask in the glow of soft, warm light and energy savings for years to come. Simply Conserve® LED Candelabra Bulbs (40W equivalent) help you set the perfect mood with your favorite chandelier, sconce, pendant, ceiling fan, or decorative lighting fixture. Dimmer and E12 socket compatible, choose from standard, frosted, or filament styles to create that perfect look. Our Candelabras are packaged in both standard and bulk options, making installations economical, quick, and convenient for homeowners, multifamily buildings, commercial properties, and contractors alike.

FEATURES

- **Warm, Welcoming Light For Every Occasion**
2700K temperature provides a soft-white (yellowish) glow ideal for living rooms, dining rooms, bedrooms, and outdoor spaces.
- **Dimmable To Create The Perfect Atmosphere**
Adjust brightness levels to set the ideal mood when paired with a dimmer switch.
- **Beautifully Energy Saving**
These bulbs don't just look good, they use up to 80% less energy than traditional 40W incandescent bulbs—illuminating welcoming savings for years to come.
- **25,000 Hour Life**
The rated average life expectancy for these lamps is equal to 23 years when used 3 hours/day.
- **Quick Install Contractor Packs**
Available in larger quantity case and bulk packs to make installations economical, quick, and convenient for contractors.



15-25,000
HOURS



DIMMABLE



MERCURY
FREE



80% ENERGY
SAVINGS

ORDERING INFORMATION

SOURCE	WATTAGE	LAMP TYPE	CCT	CONTRACTOR PACK
L = LED	04 = 4W 05 = 4.5W	CDL = Candelabra	2700K = 2700K	C60 = Contractor 60-pack F = Frosted FIL = Filament



SIMPLY CONSERVE®



1701 Charleston Regional Parkway, Suite A
Charleston, SC 29492
(843) 971-1414
www.AMConservation.com

LED Candelabra Bulbs



SIMPLYCONSERVE®

Savings Start Here™

SPECIFICATIONS

MODEL #	BASE	WATTS	CCT	LUMENS	CRI	VOLTAGE	RATED LIFE	INCAND EQUIV.	DIMMING
L04CDL2700KFILV2	E12	4W	2700K	300	≥90	120V	15,000 hrs	40W	✓
LH04CDL2700KFIL	E12	4W	2700K	300	≥90	120V	15,000 hrs	40W	✓
L05CDL2700K	E12	4.5W	2700K	350	≥80	120V	25,000 hrs	40W	✓
L05CDL2700KFC60	E12	4.5W	2700K	350	≥80	120V	25,000 hrs	40W	✓
LT05CDL2700K	E12	5W	2700K	325	≥80	120V	25,000 hrs	40W	✓
L05CDL2700K	E12	5W	2700K	325	≥80	120V	25,000 hrs	40W	✓
L05CDL2700KC60V2	E12	5W	2700K	325	≥80	120V	25,000 hrs	40W	✓

DIMENSIONS

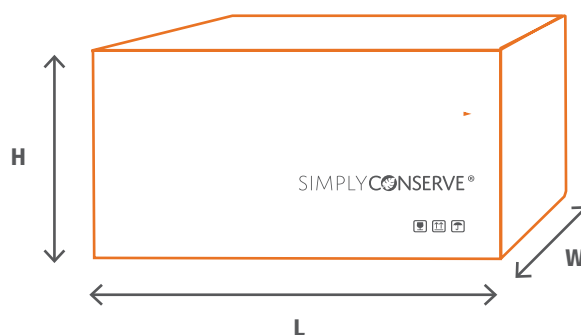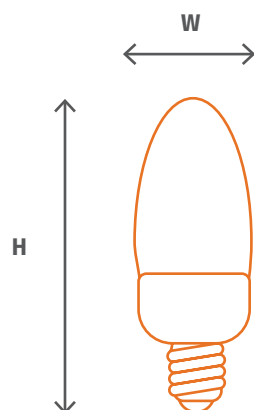

PRODUCT

MODEL #	H	W
L04CDL2700KFILV2	3.83"	1.38"
LH04CDL2700KFIL	3.83"	1.38"
L05CDL2700KF	3.83"	1.38"
L05CDL2700KFC60	3.83"	1.38"
LT05CDL2700K	3.83"	1.38"
L05CDL2700K	3.83"	1.38"
L05CDL2700KC60V2	3.83"	1.38"

CASE

MODEL #	L	W	H	GROSS WEIGHT	CASE QTY	CONTRACTOR PACKS
L04CDL2700KFILV2	10.0"	10.0"	9.7"	3.6 lbs	50	
LH04CDL2700KFIL	10.0"	10.0"	9.8"	2.65 lbs	50	
L05CDL2700KF	10.0"	10.0"	10.0"	7.75 lbs	50	
L05CDL2700KFC60	16.7"	10.5"	5.9"	5.85 lbs	60	✓
LT05CDL2700K	9.0"	9.0"	9.2"	4.25 lbs	50	
L05CDL2700K	10.1"	10.0"	9.9"	7.85 lbs	50	
L05CDL2700KC60V2	16.7"	10.5"	5.9"	5.85 lbs	60	✓

5-YEAR LIMITED WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 5 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:
customer@amconservation.com

To learn more, please visit:
www.AMConservation.com